



RIG# 8

SST ENERGY CORPORATION

OWI 1000-EH


SPECIFICATIONS

Drawworks	<i>OWI 1000EH with 1-1/4" line</i>
Drawworks horsepower	<i>1200 hp</i>
Hoisting Capacity	<i>525,000 lbs.</i>
Pumps	<i>2 X F-1600; 1600hp</i>
Pump pressure	<i>5000 psi</i>
Mobility	<i>Skidding</i>
Engines	<i>3 X Cat-C32 910KW Tier II</i>
Controls	<i>Ross Hill SCR</i>
Top Drive	<i>Canrig 275 ton</i>
Floor automation	<i>Pipe Spinners</i>
Mast	<i>Full Circle 550,000lbs on 10 lines</i>
Substructure	<i>Clear height 18'; Floor Height 22' 6"</i>
Rotary table	<i>27.5"</i>
Mud system	<i>700 bbl.</i>
Shale shakers	<i>2 X MI-Swaco Mongoose</i>
Solids Control	<i>Single cone desander and 12 cone desilter</i>
BOP Equipment	<i>As Requested</i>
Accumulator	<i>6 station -10 (12 gallon) Bottles</i>
Choke Manifold	<i>5,000 psi</i>
Gas Buster	<i>Yes</i>
Boiler	<i>125 hp</i>
Fuel	<i>20,000 gallons</i>
Water	<i>500 bbl.</i>


***Modifications available as required**

Rig 8 Location & Dryholes Drawing

DRYHOLE DIMENSIONS

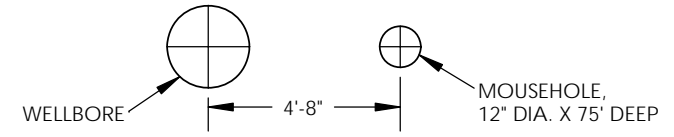


MINIMUM LOCATION DIMENSIONS

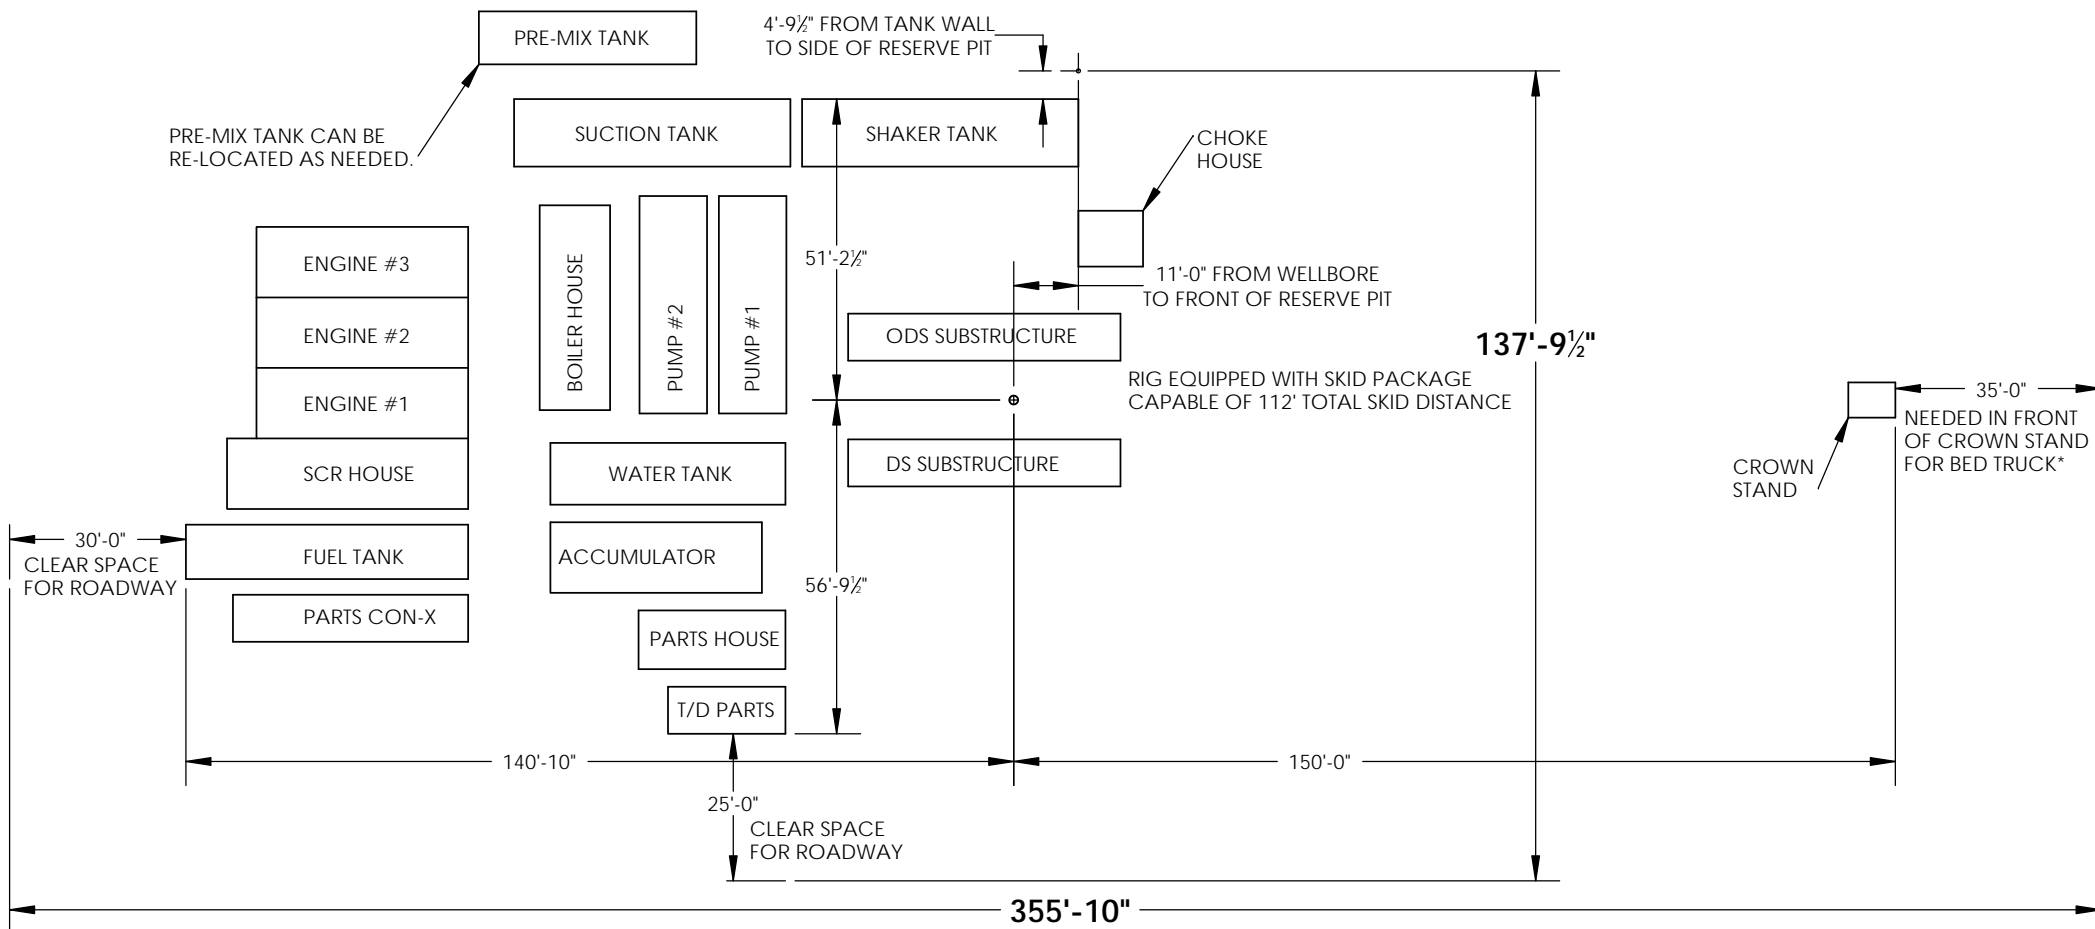

* 185'-0" CLEAR SPACE NEEDED IN FRONT OF FURTHEST WELL IF ON MULTI-WELL PAD

Rig 8 Building Spacing Drawing

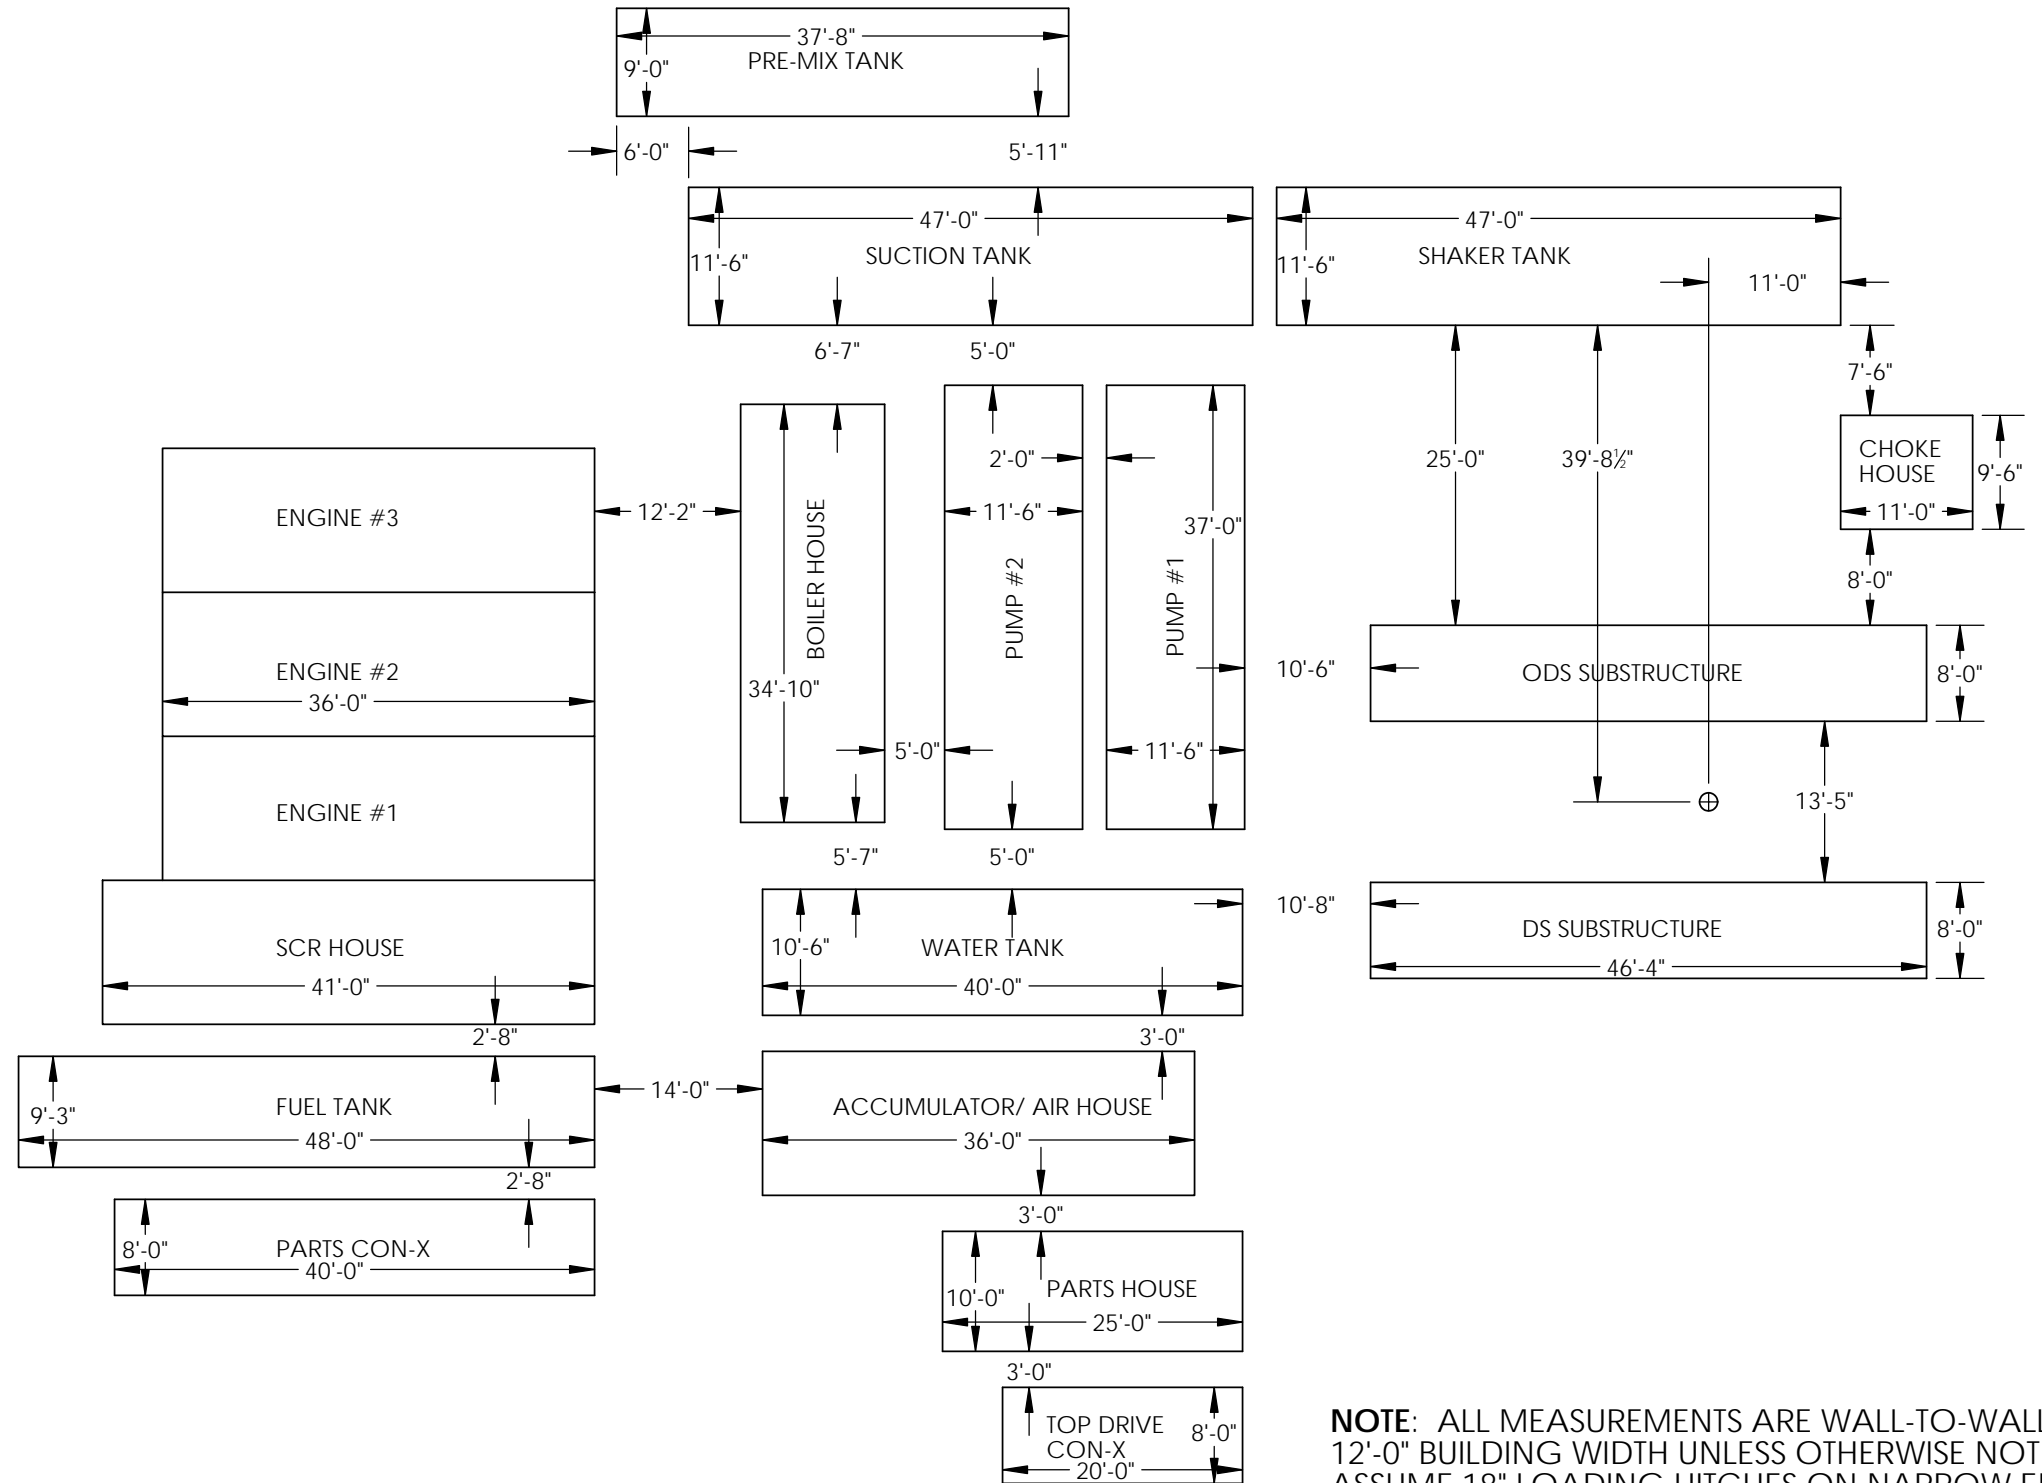

NOTE: ALL MEASUREMENTS ARE WALL-TO-WALL. 12'-0" BUILDING WIDTH UNLESS OTHERWISE NOTED. ASSUME 18" LOADING HITCHES ON NARROW ENDS.