



# RIG# 88

SST ENERGY CORPORATION \*Arriving Oct. 2019

## Cameron CMS-1800 A/C


### SPECIFICATIONS

<b>Drawworks</b>	<i>Cameron CMS-1800 with 1-3/8" line</i>
<b>Drawworks horsepower</b>	<i>1800 hp</i>
<b>Hoisting Capacity</b>	<i>750,000 lbs.</i>
<b>Pumps</b>	<i>2 X F-1600; 1600hp</i>
<b>Pump pressure</b>	<i>7500 psi</i>
<b>Mobility</b>	<i>Walking– up to 200'</i>
<b>Engines</b>	<i>3 X Cat 3512C 1,100 KW Tier II</i>
<b>Controls</b>	<i>TBD VFD</i>
<b>Top Drive</b>	<i>Canrig 500 ton</i>
<b>Floor automation</b>	<i>TM-80 and Auto Catwalk</i>
<b>Mast</b>	<i>Derrick Service 1,000,000lbs on 12 lines</i>
<b>Substructure</b>	<i>Clear height 24' 4"; Floor Height 26' 6"</i>
<b>Rotary table</b>	<i>27.5"</i>
<b>Mud system</b>	<i>1200 bbl.</i>
<b>Shale shakers</b>	<i>2 Brandt King Cobra Venom</i>
<b>Solids Control</b>	<i>Two cone desander and 16 cone desilter</i>
<b>BOP Equipment</b>	<i>As Requested</i>
<b>Accumulator</b>	<i>6 station –20 (11 gallon) Bottles</i>
<b>Choke Manifold</b>	<i>10,000 psi</i>
<b>Gas Buster</b>	<i>Yes</i>
<b>Boiler</b>	<i>150 hp</i>
<b>Fuel</b>	<i>17,000 gallons</i>
<b>Water</b>	<i>700 bbl.</i>


**\*Modifications available as required**

# Rig 88 Location & Dryholes Drawing

## DRYHOLE DIMENSIONS

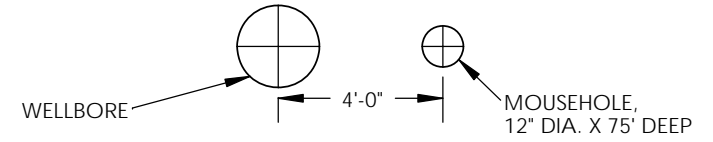


## MINIMUM LOCATION DIMENSIONS

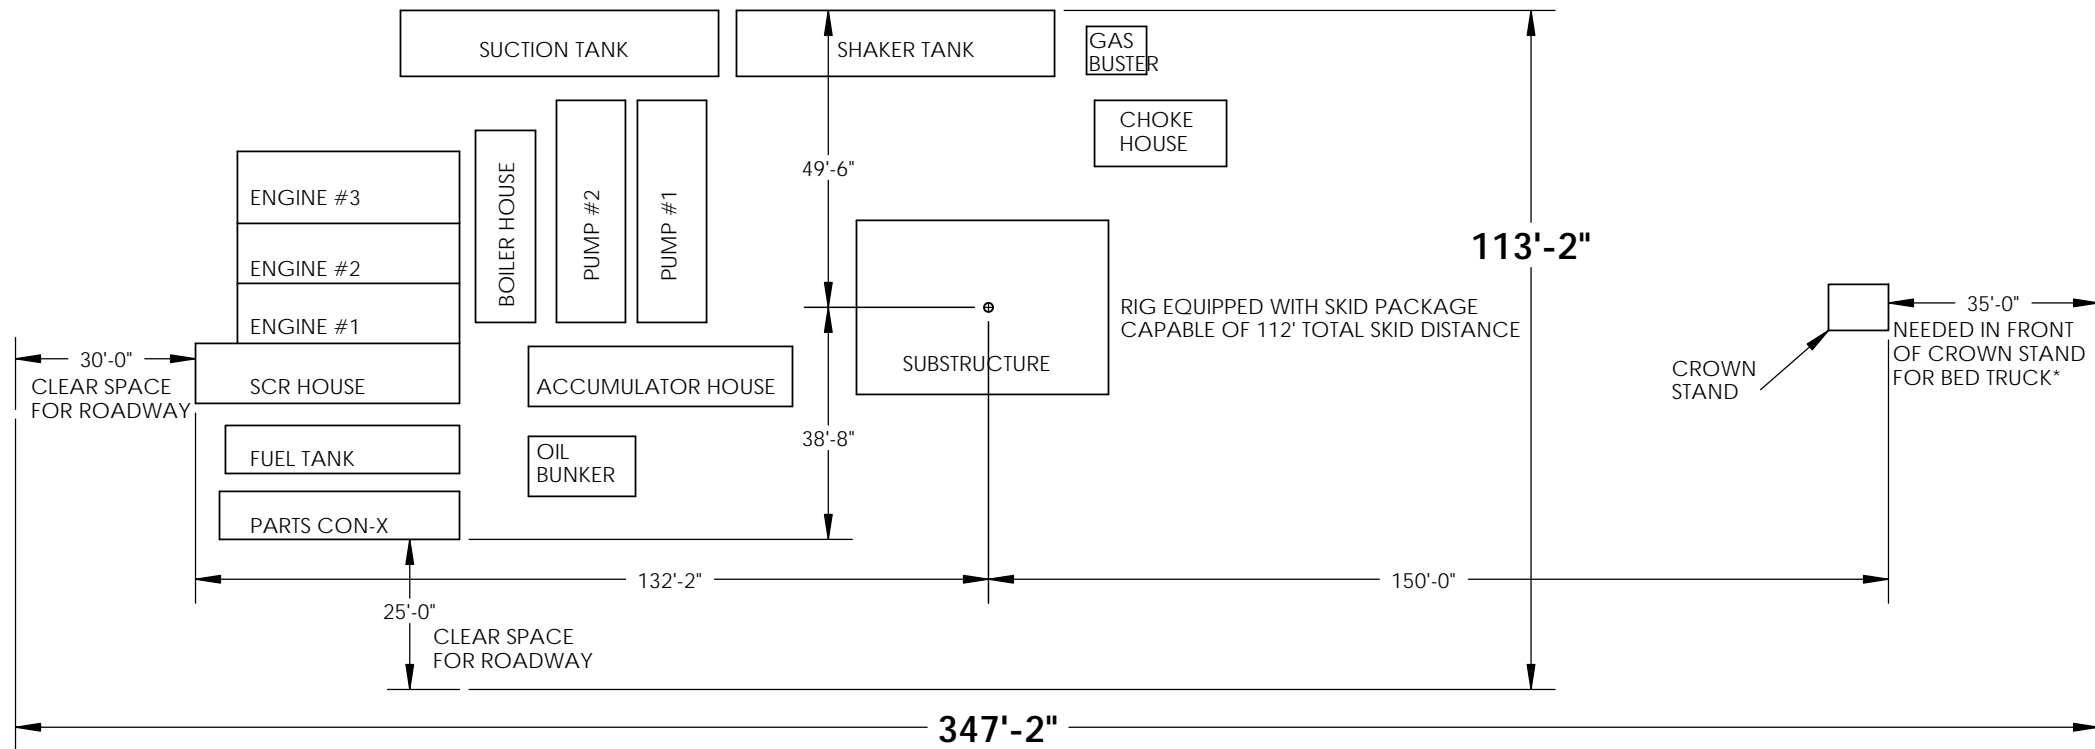

\* 185'-0" CLEAR SPACE NEEDED IN FRONT OF FURTHEST WELL IF ON MULTI-WELL PAD

# Rig 88 Building Spacing Drawing

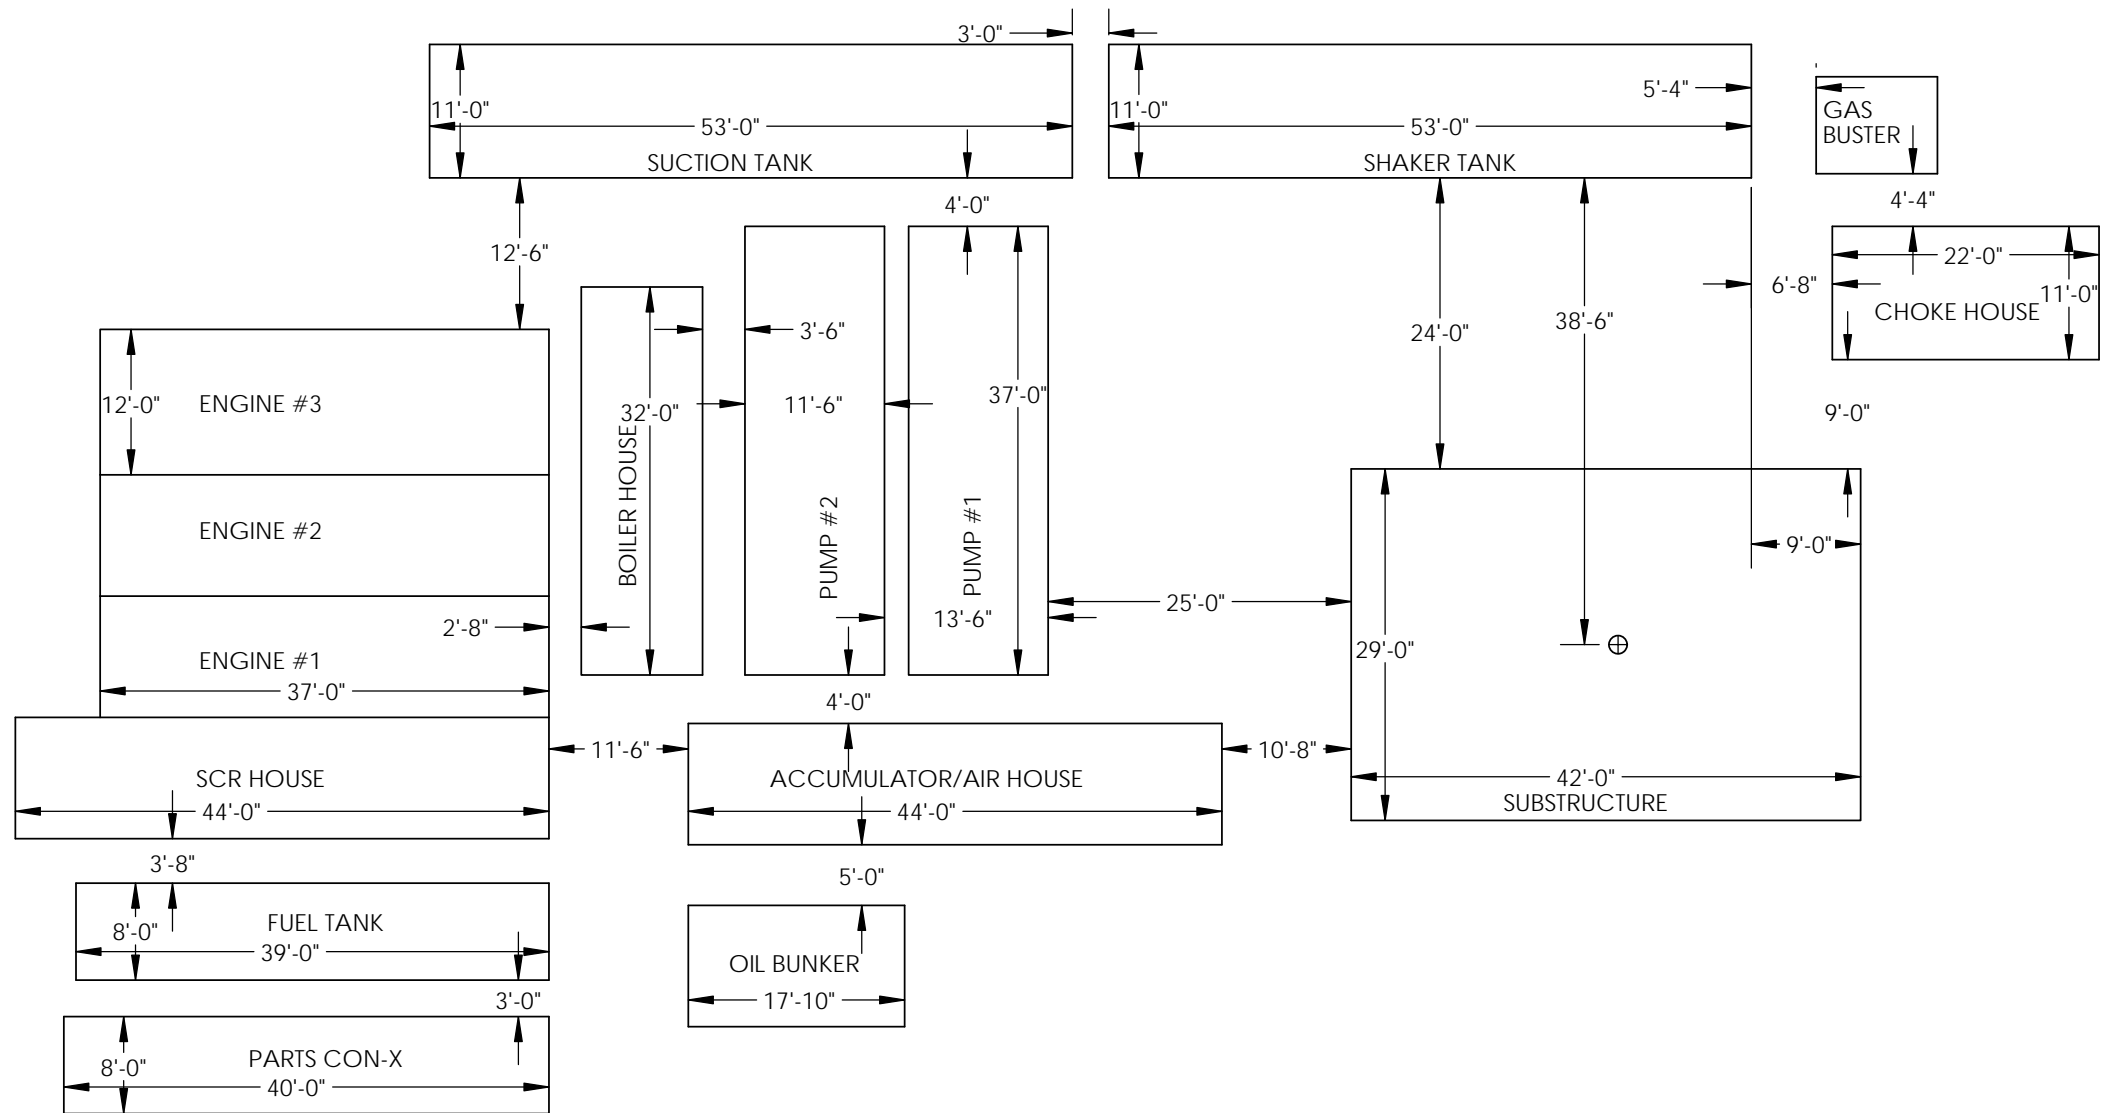

**NOTE:** ALL MEASUREMENTS ARE WALL-TO-WALL.  
 10'-0" BUILDING WIDTH UNLESS OTHERWISE NOTED.  
 ASSUME 18" LOADING HITCHES ON NARROW ENDS.