



# RIG# 17

SST ENERGY CORPORATION

## OWI 1000-EH


### SPECIFICATIONS

<b>Drawworks</b>	<i>OWI 1000EH with 1-1/4" line</i>
<b>Drawworks horsepower</b>	<i>1200 hp</i>
<b>Hoisting Capacity</b>	<i>630,000 lbs.</i>
<b>Pumps</b>	<i>3 X F-1600; 1600hp</i>
<b>Pump pressure</b>	<i>7500 psi</i>
<b>Mobility</b>	<i>Walking- up to 120'</i>
<b>Engines</b>	<i>3 X Cummins QSK-50 1,100 KW Tier II</i>
<b>Controls</b>	<i>Omron SCR/VFD</i>
<b>Top Drive</b>	<i>Canrig 275 ton</i>
<b>Floor automation</b>	<i>TM-80 and Auto Catwalk</i>
<b>Mast</b>	<i>DSII 750,000lbs on 12 lines</i>
<b>Substructure</b>	<i>Clear height 22' 8"; Floor Height 27'</i>
<b>Rotary table</b>	<i>27.5"</i>
<b>Mud system</b>	<i>1000 bbl.</i>
<b>Shale shakers</b>	<i>2 X Brandt King Cobra Venom</i>
<b>Solids Control</b>	<i>Two cone desander and 16 cone desilter</i>
<b>BOP Equipment</b>	<i>As Requested</i>
<b>Accumulator</b>	<i>5 station -10 (12 gallon) Bottles</i>
<b>Choke Manifold</b>	<i>10,000 psi</i>
<b>Gas Buster</b>	<i>Yes</i>
<b>Boiler</b>	<i>125 hp</i>
<b>Fuel</b>	<i>20,000 gallons</i>
<b>Water</b>	<i>500 bbl.</i>


**\*Modifications available as required**

# Rig 17 Location & Dryholes Drawing

## DRYHOLE DIMENSIONS

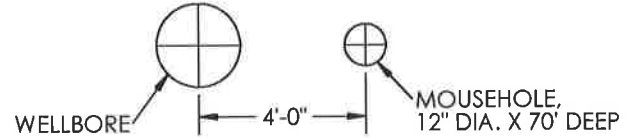

## MINIMUM LOCATION DIMENSIONS

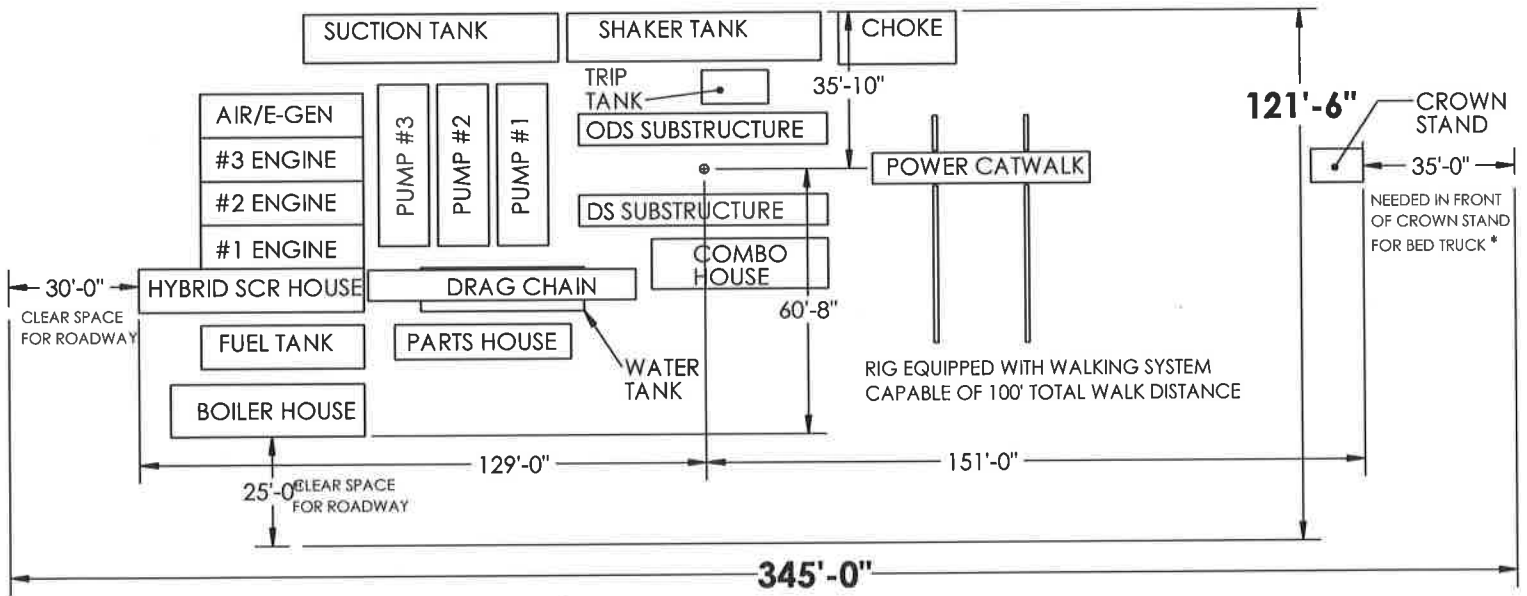

\* 186'-0" CLEAR SPACE NEEDED IN FRONT OF FURTHEST WELL IF ON MULTI-WELL PAD