



RIG# 1

SST ENERGY CORPORATION


IDECO 725-E

SPECIFICATIONS


Drawworks	<i>Ideco 725E with 1-1/8" line</i>
Drawworks horsepower	<i>750 hp</i>
Hoisting Capacity	<i>340,000 lbs.</i>
Pumps	<i>2 X 9P-100; 1000hp</i>
Pump pressure	<i>5000 psi</i>
Mobility	<i>Skidding</i>
Engines	<i>3 X Cat-D398 800 KW</i>
Controls	<i>IPS SCR</i>
Top Drive	<i>Canrig 175 ton</i>
Floor automation	<i>Pipe Spinners</i>
Mast	<i>Dreco 340,000 on 8 lines</i>
Substructure	<i>Clear height 10' 6"; Floor Height 13' 6"</i>
Rotary table	<i>20.5"</i>
Mud system	<i>600 bbl.</i>
Shale shakers	<i>1 MI-Swaco Mongoose</i>
Solids Control	<i>Single cone desander and 8 cone desilter</i>
BOP Equipment	<i>As Requested</i>
Accumulator	<i>5 station -10 (12 gallon) Bottles</i>
Choke Manifold	<i>5,000 psi</i>
Gas Buster	<i>Yes</i>
Boiler	<i>100 hp</i>
Fuel	<i>9,000 gallons</i>
Water	<i>400 bbl.</i>

***Modifications available as required**

Rig 1 Location & Dryholes Drawing

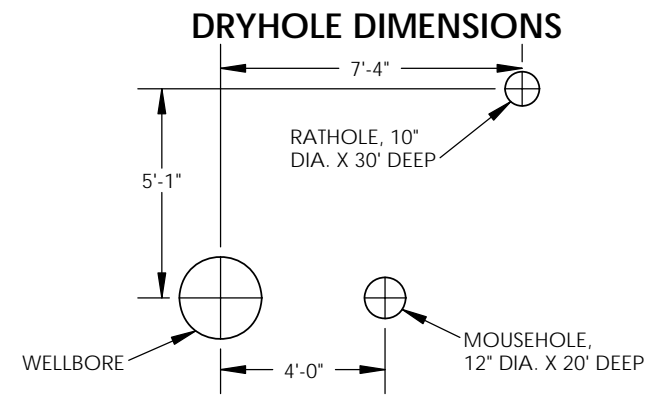


MINIMUM LOCATION DIMENSIONS

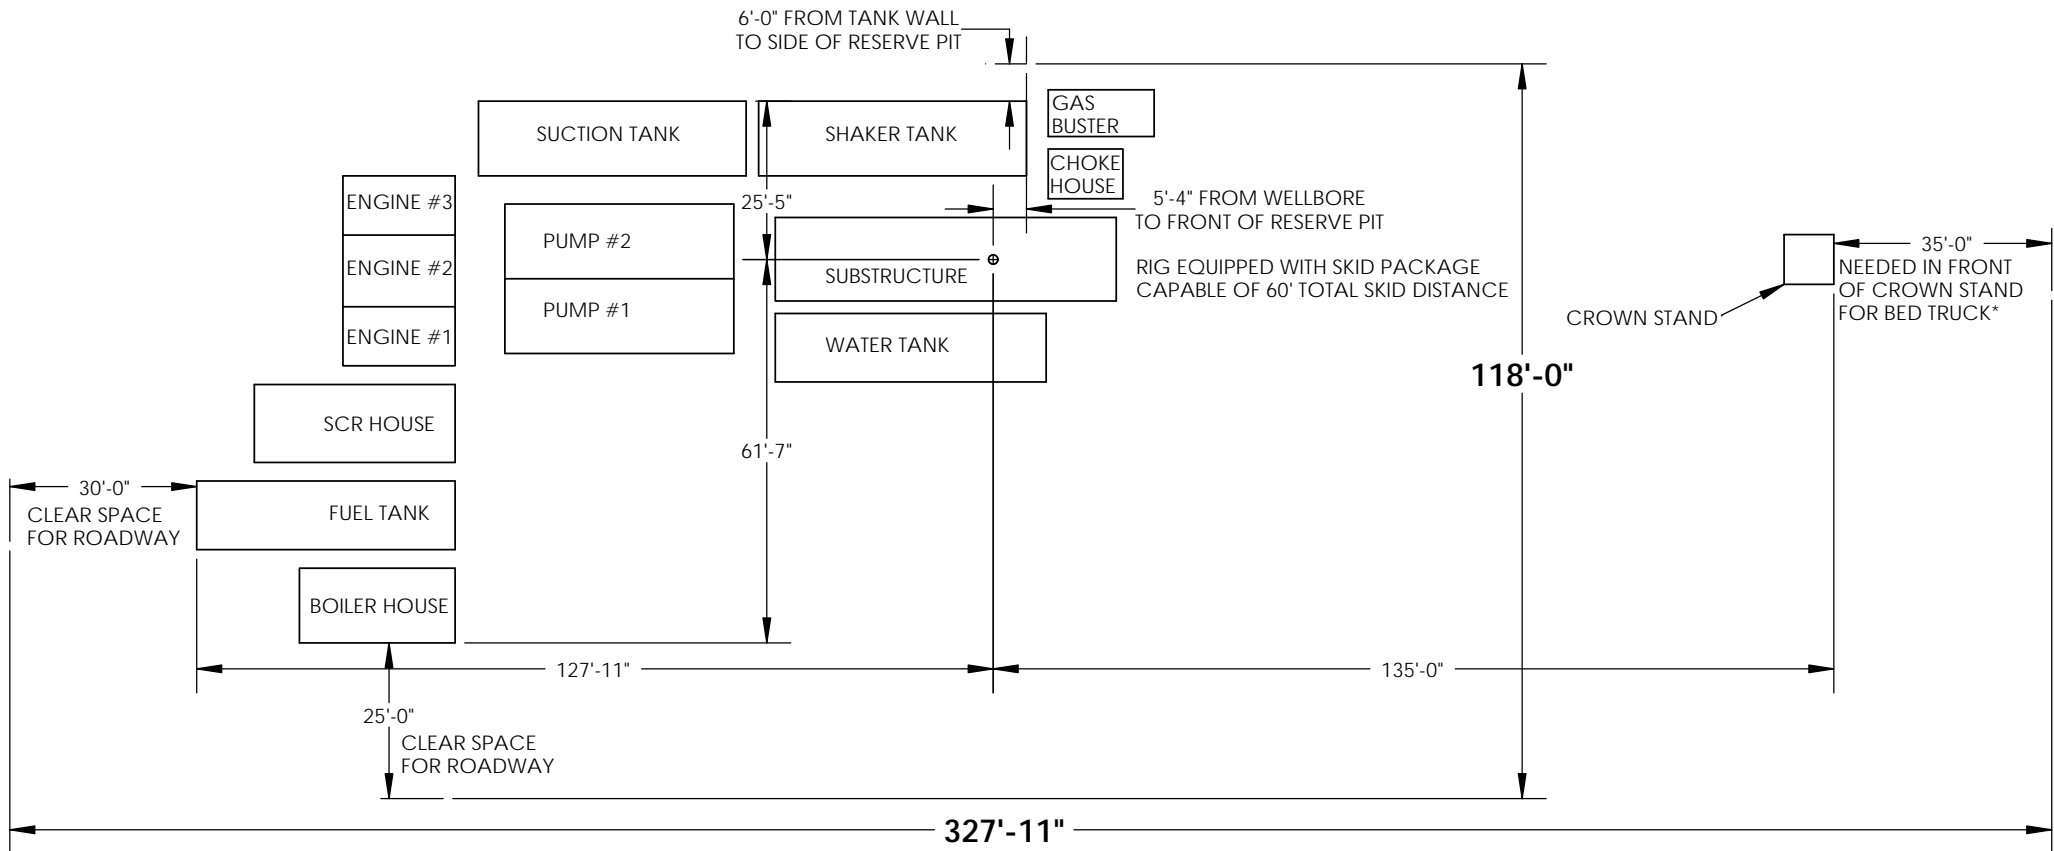

* 170'-0" CLEAR SPACE NEEDED IN FRONT OF FURTHEST WELL IF ON MULTI-WELL PAD

Rig 1 Building Spacing Drawing

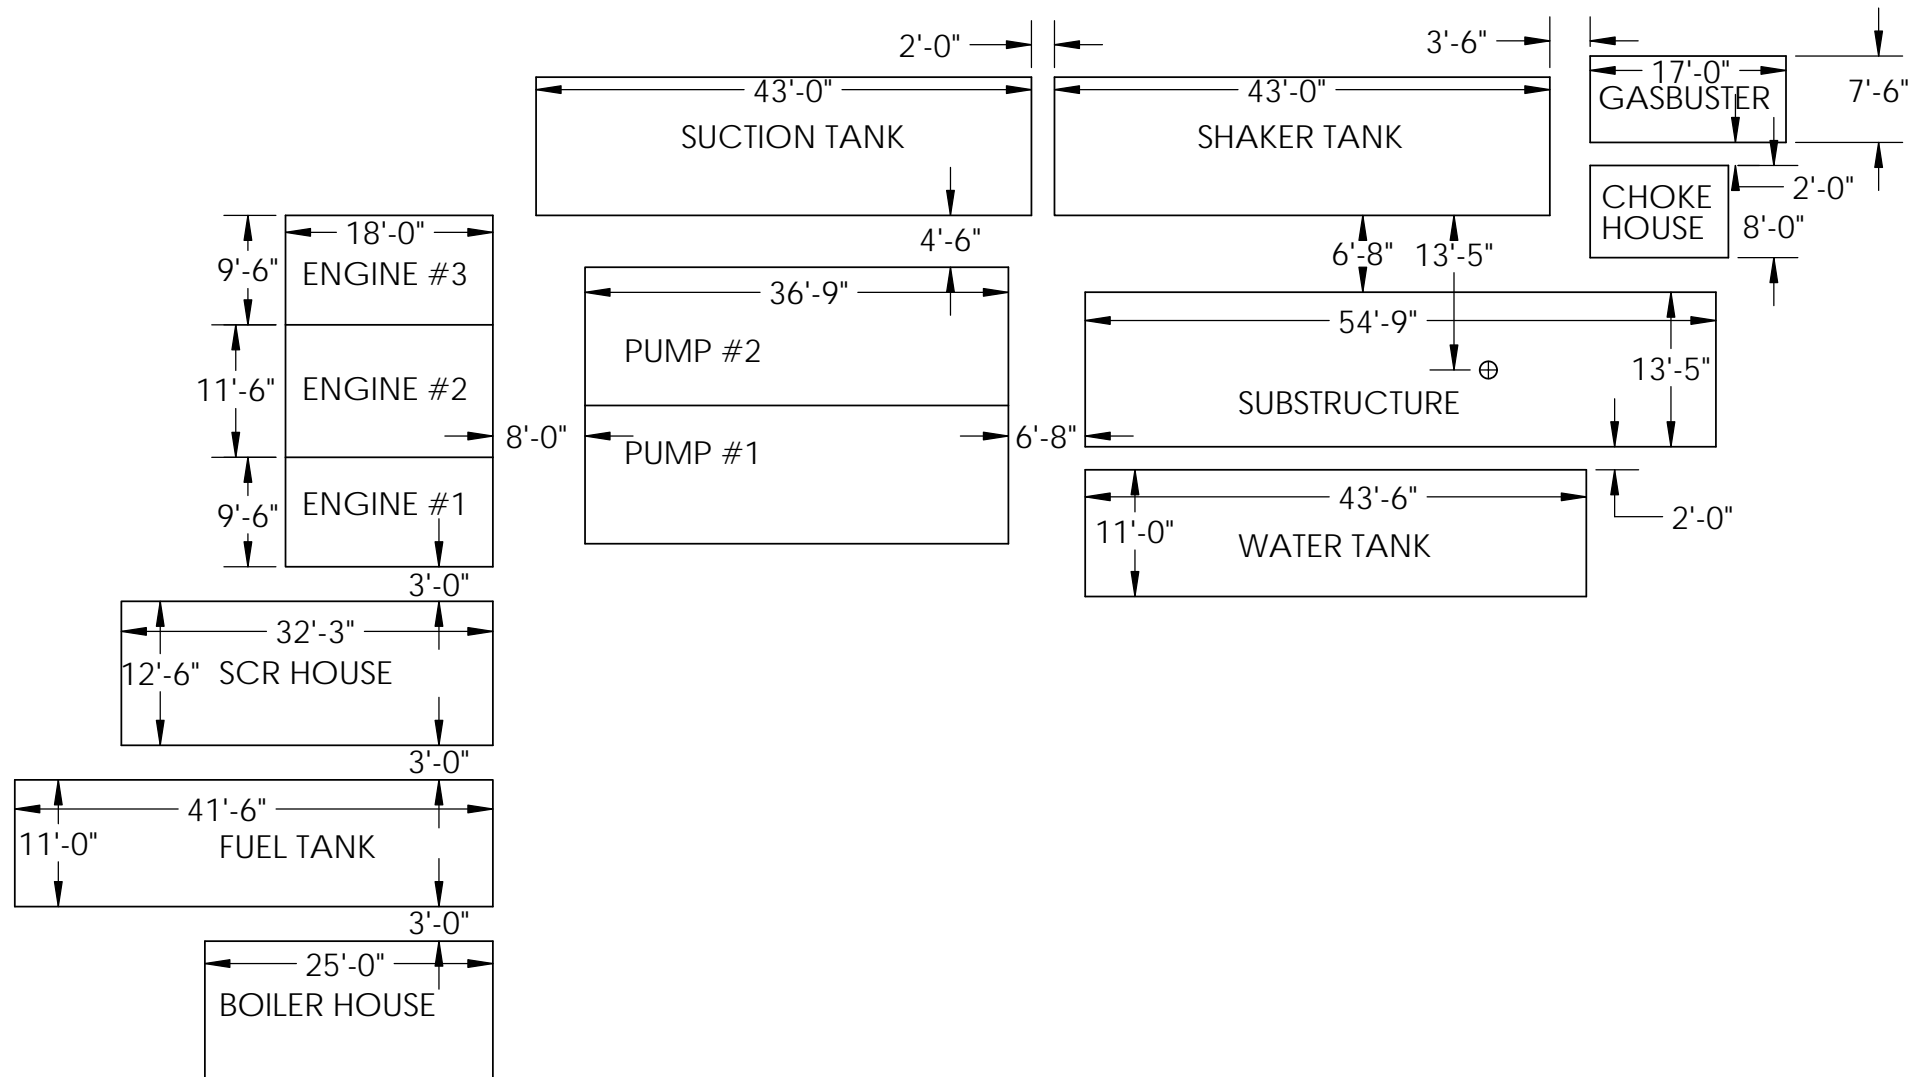

NOTE: ALL MEASUREMENTS ARE WALL-TO-WALL.
 12'-0" BUILDING WIDTH UNLESS OTHERWISE NOTED.
 ASSUME 12" LOADING HITCHES ON NARROW ENDS.